

4600 Lift and Slide HI System (High Insulation) Thermally Broken

Transmittance

Uw from 0.9 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 55 mm

Maximum acoustic insulation **Rw = 43 dBA**

Categories achieved at test centre

Air permeability
(EN 12207): Class 4

Water tightness
(EN 12208): Class 9A

Wind resistance
(EN 12210): Class C5
Reference test 4,0 x 2,4 m, 2 sashes

Finishes

Possibility of dual colour
Colour powder coating (RAL, mottled and rough)
Wood effect powder coating
Anti-bacterial powder coating
Anodized



Sections



Frame 160,6 mm
251mm 3 rails
Sash 70 mm

Polyamide strip length


Frame 35 mm Sash 24 mm

Profile thickness

Door 2,0 mm

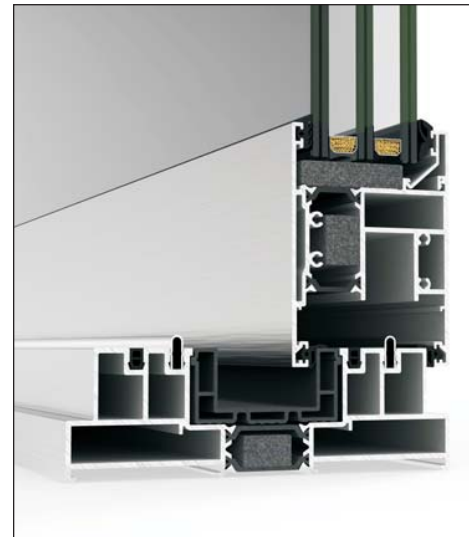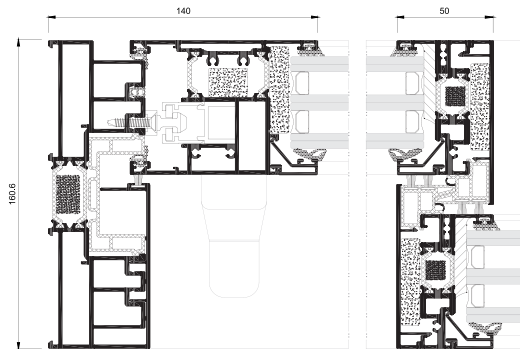

Opening possibilities

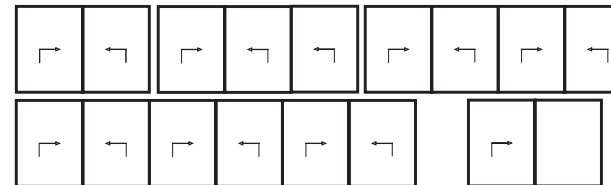

Sliding of 2, 3, 4 & 6 sashes.
Possibility of 1 rail (1 sash +
1 fixed light).
Possibility of 3 rails.

Maximum dimensions/sash

Width (L) = 3300 mm
Height (H) = 3300 mm

Consult maximum weight and dimensions according to typologies

Maximum weight/sash

400 Kg